



LEDGE

GFRG ACCESS PANELS


SIMPLE. FAST. BETTER.

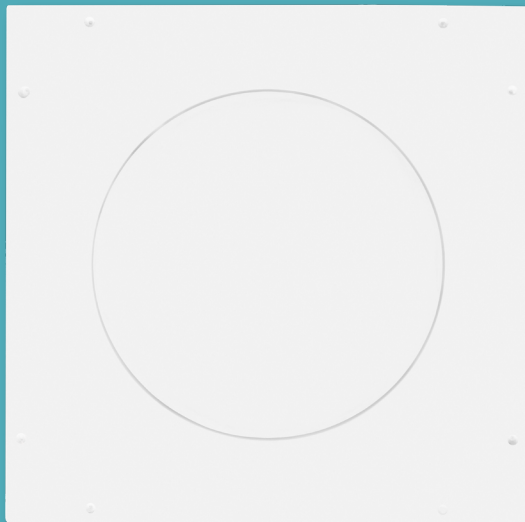




LEDGE
GFRG ACCESS PANELS


INSTALLATION INSTRUCTIONS




Using a typical drywall screw, attach the access panel frame to the framing using the counter sink recesses.

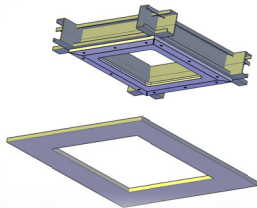

Install drywall per typical drywall specifications.

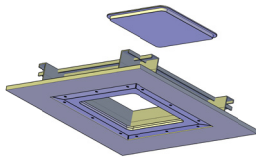

Make sure the access panel tape joints align with the adjacent drywall. Shim if necessary. Treat the joint as a typical drywall joint. Tape and finish.

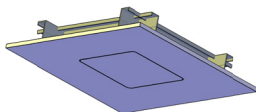

Drop door in place and finish the door and frame to the drywall specifications.




Ledge GFRG Access Panels, manufactured by GC Products, are made from Glass Fiber Reinforced Gypsum (GRG/GFRG) and are capable of blending into any ceiling. They are available in a variety of standard sizes as well as almost limitless custom sizes. All Ledge GFRG Access Panels are available as drop-in or hinged and with round or square corners. Visit www.LedgePanels.com or call us at 916-645-3870 for more information.

Below are the standard sizes:

PART NUMBER	DOOR DIMENSIONS	FRAME DIMENSIONS	TYPICAL WEIGHTS
LP-0909	9" x 9"	15" x 15"	4 lbs
LP-1212	12" x 12"	18" x 18"	6 lbs
LP-1616	16" x 16"	22" x 22"	8 lbs
LP-1818	18" x 18"	24" x 24"	9 lbs
LP-2424	24" x 24"	30" x 30"	12 lbs
LP-2230*	22" x 30"	24" x 36"	15 lbs
LP-3030*	30" x 30"	36" x 36"	19 lbs

*Available with or without gasket

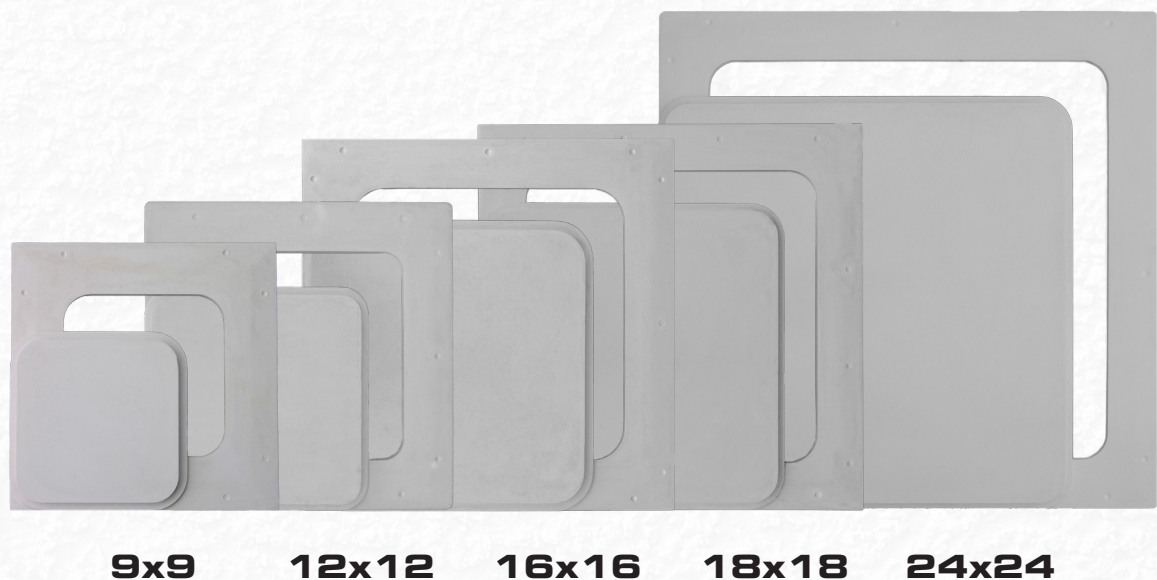



LEDGE GFRG ACCESS PANELS PRODUCT DATA

Ledge GFRG Access Panels are generally specified by their opening sizes. An additional 6" needs to be added for the rough opening size (see installation detail for clarification).

All standard access panel sizes are available with drop-in or hinged type doors. Panels are gypsum based for interior applications (cement-based panels are available for exterior use and may be special ordered). Custom sizes are available upon request. Visit www.LedgePanels.com or call us at 916-645-3870 for more information.

PHYSICAL SPECIFICATIONS	
Shell Thickness	1/8" to 3/16"
Fastener Test Pull Out (wood stud)	525 lbs. Avg.
Fastener Test Pull Out (metal stud)	215 lbs. Avg.
Fastener Push Through Test	350 lbs. Avg.
Flame Spread (ASTM E84)	0
Smoke Index (ASTM E84)	5
Combustion (ASTM E84)	None
Classification (ASTM E84)	A
Fire Rating	Non-Rated

Environmental Testing

Ledge GFRG Access Panels meet the Volatile Organic Compound (VOC) emissions requirements according to the California Department of Public Health CDPH/EHLB/ Standard Method Version 1.2, 2017 (Emission testing method for CA Specification 01350)